


# Giddy Up

PVC FREE  
FAUX LEATHER  
COLLECTION



EVELYN EARNEST, INC.

# Howdy



Saddle



Peanut



Dove



Putty



Taupe



Cranberry



Molasses



Chili



Quarry



Black



Cocoa




Saddle



Magnetite

# Partner

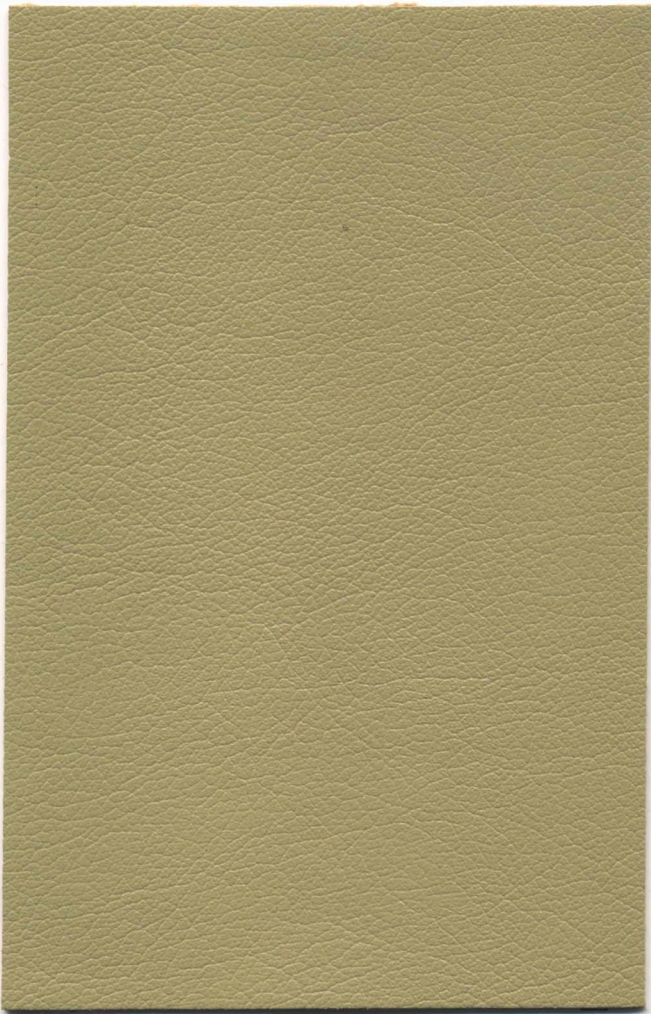

Buff



Cream



White



Buttercream



Pistachio



Clementine



Honeydew



Metal



Quarry



Red



Breezy



Black



Steel



Java



Batik

# HOWDY

Content: 100% Polyurethane  
Backing: 43% Recycled Leather, 40% Polyester, 17% Cotton  
Width: 54"  
Environmental Friendly Benefits: PVC Free

## PERFORMANCE

Abrasion: Heavy Duty - Exceeds 100,00 Cycles  
(Wyzenbeek - #8 Cotton Duck Aradant) (ASTM D415-07)  
Light Fastness: Class 4 (ASTM D3597, AATCC8) Wet  
Class 4 (ASTM D3597, AATCC8) Dry

## FLAMMABILITY

Passes: California Tech. Bulletin #117 Section E (CS-191-53)  
UFAC Class 1  
NFPA 260 Class 1  
MVSS 302 Pass

## EVELYN EARNEST, INC.

P.O. BOX 425

EDEN, NC 27288

P. 336-627-0170

F. 336-627-0526

E. [SAMPLES@EVELYNEARNEST.COM](mailto:SAMPLES@EVELYNEARNEST.COM)

[WWW.EVELYNEARNEST.COM](http://WWW.EVELYNEARNEST.COM)

# PARTNER

Content: 100% Polyurethane  
Backing: 87% Polyester, 13% Cotton  
Finish: Antimicrobial -- Silver Based Ion Technology I-Clean -- Innovative Easy Clean Technology  
Width: 54"  
Environmental Friendly Benefits: PVC Free

## PERFORMANCE

Abrasion: ASTM D 4157 / Heavy Duty - Exceeds 200,00 Double Rubs  
Breaking Strength: ASTM D 5034-95 / Warp: 141 Fill: 78  
Seam Slippage: ASTM D 4034 / Warp: 50 Fill: 69  
Tear Strength: ASTM D 2261-96 / Warp: 13 Fill: 9  
Pilling Resistance: ASTM D 3511 / Class 5  
Colorfastness to Light: AATCC 16 Option 1/ Grade 4 at 40 hrs.  
Colofastness to Bleach: AATCC 130: Class 5  
Crocking: AATCC 8 / Class 5 wet & Dry  
Hydrolysis ASTM 3690: Pass  
Cold Crack (CFFA 6a) -- pass (roller at -10° F)  
Blocking (CFFA 4) -- class 1

## FLAMMABILITY

UFAC Class1  
CA 117E Class 1  
NFPA 260 Class 1  
MVSS 302 pass